


XQY-PS3-2/8-SE

精密高频功分/合路器

precision RF power splitter/Combiner

参数/Parameters	规格/Specifications
频率范围 Frequency Range	2000 ~ 8000 MHz
插入损耗 Insertion Loss	≤ 1.0 dB (Excluding theoretical loss 未含理论损耗 4.8 dB)
输入驻波 Input Port VSWR	Typ.1.18 / Max.1.30
输出驻波 Output Port VSWR	Typ.1.14 / Max.1.25
隔离度 Isolation	Typ.26dB / Min.18dB
幅度平衡 Amplitude Balance	±0.5dB
相位平衡 Phase Balance	±5°
阻抗 Impedance	50 Ohms
端口接头 Input/Output Connectors	SMA-Female (Passivated Stainless Steel)
承受功率 Power Rating	Splitter 分路器用时 20W; Combiner 合路器用时 1W
工作温度 Operation Temperature	-45°C ~ +85°C
表面处理 Surface Finishing	Black paint / Blue paint 黑色烤漆/蓝色烤漆
外形尺寸 Outline Dimensions	66.5*37.5*10 (mm)
重量 Weight	64 (g)

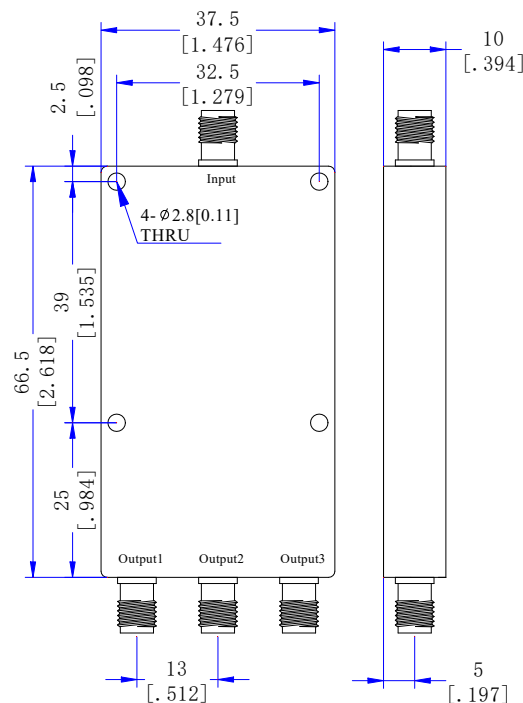

注: 尺寸(mm/[英寸]), 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)