


# 射频同轴转接器/ RF Coaxial Adapter

## XQY-DIN-N-JKSD

项目 Project	指标 Indicators
产品名称 Product Name	射频转接器/RF Adaptor
频率范围 Frequency Range	DC-7.5GHz
驻波比 VSWR	1.25:1 (max)
阻抗 Impedance	50 $\Omega$
插入损耗 Insertion Loss	0.25dB (max)
介质耐电压 Dielectric withstand voltage	1000 V
使用寿命 Service life	$\geq 500$
绝缘电阻 Insulation Resistance	$\geq 5000M\Omega$
A 接头类型 A connector type	DIN(7/16   L29)-Male
B 接头类型 B connector type	N-Female
工作温度 Operation Temperature	-55°C ~ +165°C
内导体材质 Inner conductor material	磷青铜 镀银 Phosphor bronze silver plating
外导体材质 External conductor material	黄铜 镀三元合金 Brass plated ternary alloy
绝缘体 Insulator	PTFE

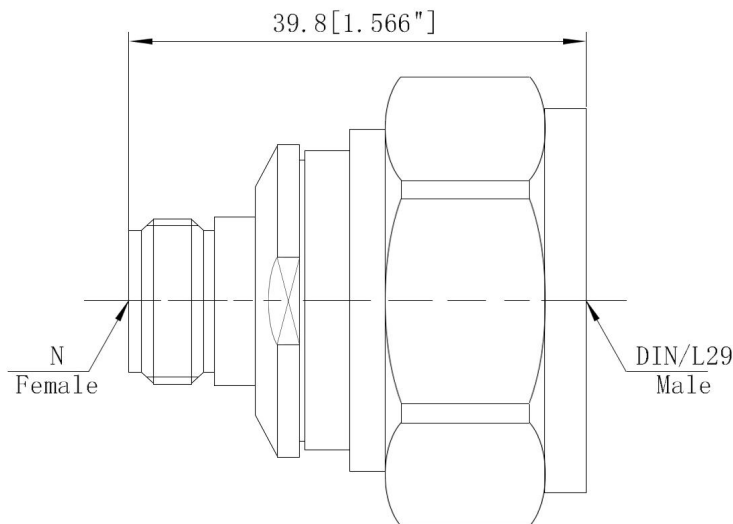

注: 尺寸(mm/[英寸]) , 一般公差( $\pm 0.05$ )

Note: Dimensions (mm / [inch]), General tolerance ( $\pm 0.05$ )



深圳市芯启源科技有限公司  
Shenzhen xinqiyuan Technology Co., Ltd.

技术文件 Technical Data Sheet

文档编号 DN: XQY002-1710210-M

广东省深圳市宝安区新安街道创业二路28区宝安新一代信息技术产业园C座525室  
525, Block C, Bao'an new generation information technology industrial park,  
Chuangye Second Road, Xin'an Street, Bao'an district, Shenzhen city, Guangdong  
province

Website: [www.xqy-tech.com](http://www.xqy-tech.com)  
TLE: 0755-23345158  
E-mail: [Hansen.hou@xqy-tech.com](mailto:Hansen.hou@xqy-tech.com)

页码 Page  
2 of 2